

Eagle Copters Maintenance Ltd. 823 McTavish Road NE Calgary, Alberta, Canada T2E 7G9

Tel: 1 403 250 7370 Fax: 1 403 250 7110 http://www.eaglecopters.com

ROTORCRAFT FLIGHT MANUAL SUPPLEMENT T5317B High Performance Utility Data with the BLR Fast Fin Installed

FMS-D212-725-4

Eagle Single Bell 212 Models

TCCA STC SH07-28 FAA STC SR02831NY

Sections 1 – 4 of this document comprise the Approved Flight Manual Supplement. Compliance with Section 1, Limitations is mandatory. Section 5 is unapproved and is provided for information only.

> AIRCRAFT CERTIFICATION DIVISION

Approval Date 19-02

Prepared By:

W. Kennedy, P. Eng.

Engineer

Reviewed By:

D. Shepherd, P. Eng. Chief Engineer

Reviewed by.

• COPYRIGHT © 2019 BY EAGLE COPTERS MAINTENANCE LTD •

This document is private and confidential and is supplied on the express condition that it is not to be used for any purpose or copied or communicated to any other person without written permission from Eagle Copters Maintenance Ltd.

Revision: A

Date: 19.02.15

TCCA Approved



This page intentionally left blank

• COPYRIGHT © 2019 BY EAGLE COPTERS MAINTENANCE LTD •

This document is private and confidential and is supplied on the express condition that it is not to be used for any purpose or copied or communicated to any other person without written permission from Eagle Copters Maintenance Ltd.

Revision: A



Log of Revisions

Revision A..... 2019.02.15

List of Effective Pages

Page	Revision
Intro-1	Α
thru	-
Intro-5	Α
1-1	Α
thru	-
1-3	Α
2-1	Α
3-1	Α
	_
4-1	Α
thru	-
4-15	Α
5-1	Α

• COPYRIGHT © 2019 BY EAGLE COPTERS MAINTENANCE LTD •

This document is private and confidential and is supplied on the express condition that it is not to be used for any purpose or copied or communicated to any other person without written permission from Eagle Copters Maintenance Ltd.

Revision: A



Revisions

Revised text is indicated by a black vertical line. Insert latest revision pages; dispose of superseded pages.

• COPYRIGHT © 2019 BY EAGLE COPTERS MAINTENANCE LTD •

This document is private and confidential and is supplied on the express condition that it is not to be used for any purpose or copied or communicated to any other person without written permission from Eagle Copters Maintenance Ltd.

Revision: A



General Information

This Flight Manual Supplement is required for aircraft that have been modified with the installation of a Honeywell T5317B engine as per TCCA STC SH07-28 / FAA STC SR02831NY and which have the BLR p/n FF212-201U or p/n FF212-201F Fast Fin installed per STC SH08-55/SR01865SE and require high performance for utility operations. This FMS supplements/replaces some of the information presented in FMS-D212-725-1 and must be in the helicopter when the high performance utility data is being utilized for operations. Performance data presented herein permit credit for an engine delivering above specification power where positive performance margin has been determined from the power assurance procedures defined in paragraph 4.2.

This FMS is divided into five sections as follows:

Section 1 Limitations

Section 2 Normal Procedures

Section 3 Emergency and Malfunction Procedures

Section 4 Performance Data

Section 5 Weight and Balance Data

Sections 1 through 4 contain Transport Canada approved data necessary to operate the helicopter in a safe and efficient manner.

Section 5 provides weight and balance data essential for safe operation of the helicopter.

• COPYRIGHT © 2019 BY EAGLE COPTERS MAINTENANCE LTD •

This document is private and confidential and is supplied on the express condition that it is not to be used for any purpose or copied or communicated to any other person without written permission from Eagle Copters Maintenance Ltd.

Revision: A

TCCA Approved



Limitations

	Table of Contents	
1.5.1 1.6	Configuration Required Equipment Weight and Center of Gravity Weight	1-2 1-3
List of Figures		
	1-1 – Weight-Altitude-Temperature (WAT) Chart for Aircraft wast Fin Installed	

• COPYRIGHT © 2019 BY EAGLE COPTERS MAINTENANCE LTD •

This document is private and confidential and is supplied on the express condition that it is not to be used for any purpose or copied or communicated to any other person without written permission from Eagle Copters Maintenance Ltd.

Revision: A



Limitations

1.5 Configuration

1.5.1 Required Equipment

T5317B Engine and BLR p/n FF212-201U or p/n FF212-201F Fast Fin installed per STC SH08-55/SR01865SE

• COPYRIGHT © 2019 BY EAGLE COPTERS MAINTENANCE LTD •

This document is private and confidential and is supplied on the express condition that it is not to be used for any purpose or copied or communicated to any other person without written permission from Eagle Copters Maintenance Ltd.

Revision: A



1.6 Weight and Center of Gravity

1.6.1 Weight

Refer to weight-altitude-temperature limitations for takeoff, landing and in ground effect maneuvers chart (Figure 1-1) for aircraft with the BLR Fast Fin installed.

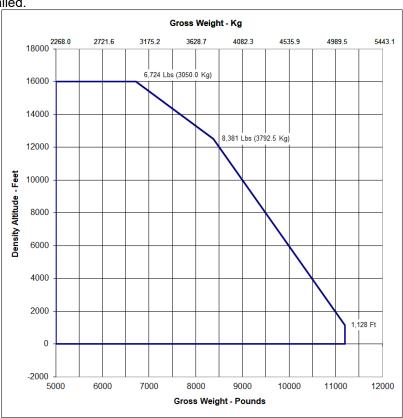


Figure 1-1 – Weight-Altitude-Temperature (WAT) Chart for Aircraft with the BLR Fast Fin Installed

• COPYRIGHT © 2019 BY EAGLE COPTERS MAINTENANCE LTD •

This document is private and confidential and is supplied on the express condition that it is not to be used for any purpose or copied or communicated to any other person without written permission from Eagle Copters Maintenance Ltd.

Revision: A



Normal Procedures

No change from Flight Manual Supplement FMS-D212-725-1 Revision H, dated 2019 February 15, or later TCCA approved revision.

• COPYRIGHT © 2019 BY EAGLE COPTERS MAINTENANCE LTD •

This document is private and confidential and is supplied on the express condition that it is not to be used for any purpose or copied or communicated to any other person without written permission from Eagle Copters Maintenance Ltd.

Revision: A
Date: 19

19.02.15

TCCA Approved



Emergency Procedures

No change from Flight Manual Supplement FMS-D212-725-1 Revision H, dated 2019 February 15, or later TCCA approved revision.

• COPYRIGHT © 2019 BY EAGLE COPTERS MAINTENANCE LTD •

This document is private and confidential and is supplied on the express condition that it is not to be used for any purpose or copied or communicated to any other person without written permission from Eagle Copters Maintenance Ltd.

Revision: A
Date: 19

19.02.15

TCCA Approved



Performance Data

Table of Contents

4.1 Engine Operation Check Charts (D)	4-2
4.2 Power Assurance Checks (D)	4-3
4.2.1 Sample Problem – MGT Limited	4-3
4.2.2 Sample Problem – N1 Limited	4-5
4.3 Hover Ceiling Charts (D)	4-7
List of Figures	
Figure 4-1 – Power Assurance Check – MGT Limited (D)	4-4
Figure 4-2 – Power Assurance Check – N1 Limited (D)	4-6
Figure 4-3 – Hover Ceiling (without Particle Separator) (Sht 1 of 8)	4-8
Figure 4-3 – Hover Ceiling (without Particle Separator) (Sht 2 of 8)	4-9
Figure 4-3 – Hover Ceiling (without Particle Separator) (Sht 3 of 8)	4-10
Figure 4-3 – Hover Ceiling (without Particle Separator) (Sht 4 of 8)	4-11
Figure 4-3 – Hover Ceiling (without Particle Separator) (Sht 5 of 8)	4-12
Figure 4-3 – Hover Ceiling (without Particle Separator) (Sht 6 of 8)	4-13
Figure 4-3 – Hover Ceiling (without Particle Separator) (Sht 7 of 8)	4-14
Figure 4-3 – Hover Ceiling (without Particle Separator) (Sht 8 of 8)	4-15

• COPYRIGHT © 2019 BY EAGLE COPTERS MAINTENANCE LTD •

This document is private and confidential and is supplied on the express condition that it is not to be used for any purpose or copied or communicated to any other person without written permission from Eagle Copters Maintenance Ltd.

Revision:



Performance Data

4.1 Engine Operation Check Charts (D)

The Power Assurance Check – MGT Limited chart (Figure 4-1) and Power Assurance Check – N1 Limited chart (Figure 4-2) are provided to aid the pilot in determining if the engine can produce installed power required to meet the published performance data. The power assurance checks can easily be made while the aircraft is in hover, using normal cockpit instruments and using the methods described herein. It is acceptable to use one (either Figure 4-1 or 4-2) or both charts to complete the power assurance check.

The power assurance checks outlined in this Section apply only to aircraft modified with the T5317B engine and which have the BLR p/n FF212-201U or p/n FF212-201F Fast Fin installed per STC SH08-55/SR01865SE.

When opting to operate in accordance with the Performance Charts presented in this Supplement, the power assurance check must be performed daily. Additional checks should be made if unusual operating conditions or indications arise. It is pilot responsibility to accomplish the procedure safely, considering passenger load, terrain being overflown, and qualifications of persons on board to assist in watching for other air traffic and to record power check data.

Failure of the engine to meet the requirements of the power assurance check may result in the inability of the aircraft to achieve the published performance. If this occurs, use of the hover performance charts in this FMS is not authorized and the aircraft may not be able to meet the guaranteed power performance to be able to operate under the required terms of contract.

In order to continue operation of the aircraft, the pilot may elect to consult the data provided in FMS-D212-725-1.

• COPYRIGHT © 2019 BY EAGLE COPTERS MAINTENANCE LTD •

This document is private and confidential and is supplied on the express condition that it is not to be used for any purpose or copied or communicated to any other person without written permission from Eagle Copters Maintenance Ltd.

Revision: A
Date: 19

19.02.15



4.2 Power Assurance Checks (D)

4.2.1 Sample Problem – MGT Limited

Stabilize the helicopter headed into the wind at a hover with De-ice OFF and cabin heat OFF; the following is an example:

Pressure altitude Example 10000 ft

Torquemeter pressure 52.9 PSI (95%)

Read and record the following values from the aircraft instruments:

Ambient air temperature 0°C
Measured gas temperature 800°C

Enter chart (Figure 4-1) at Torquemeter pressure (Engine Torque). Proceed vertically to Pressure Altitude. Proceed horizontally to Outside Air Temperature (OAT). Proceed vertically to Measured Gas Temperature (MGT).

Figure 4-1 - Maximum Allowable MGT = 820°C

Since the actual measured gas temperature (800°C) is not greater than the charted measured gas temperature (820°C), the relation between power and measured gas temperature is satisfactory.

If this check is not satisfactory, there is reason to believe that the engine has deteriorated to the extent that the published performance may not be obtained.

• COPYRIGHT © 2019 BY EAGLE COPTERS MAINTENANCE LTD •

This document is private and confidential and is supplied on the express condition that it is not to be used for any purpose or copied or communicated to any other person without written permission from Eagle Copters Maintenance Ltd.



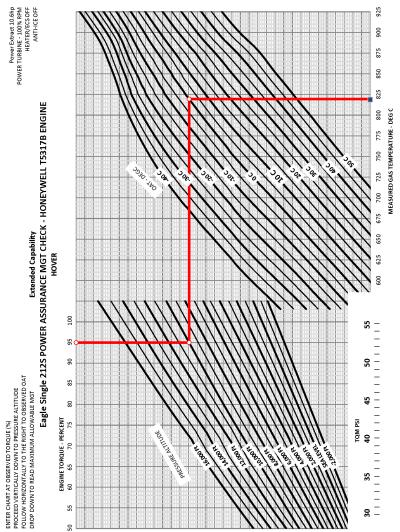


Figure 4-1 – Power Assurance Check – MGT Limited (D)

• COPYRIGHT © 2019 BY EAGLE COPTERS MAINTENANCE LTD •

This document is private and confidential and is supplied on the express condition that it is not to be used for any purpose or copied or communicated to any other person without written permission from Eagle Copters Maintenance Ltd.

Revision: A



4.2.2 Sample Problem – N1 Limited

Stabilize the helicopter headed into the wind at a hover with De-ice OFF and cabin heat OFF; the following is an example:

Pressure altitude Example 10000 ft

Torquemeter pressure 52.9 PSI (95%)

Read and record the following values from the aircraft instruments:

Ambient air temperature 0°C
Gas Producer (N1) RPM 97.0%

Enter chart (Figure 4-2) at Torquemeter pressure (Engine Torque). Proceed vertically to Pressure Altitude. Proceed horizontally to Outside Air Temperature (OAT). Proceed vertically to Maximum Allowable Percent N1.

Figure 4-2 - Maximum Allowable Percent N1 = 97.8%

Since the actual Percent N1 (97.0%) is not greater than the charted Percent N1 (97.8%), the relation between power and Gas Producer RPM is satisfactory.

If this check is not satisfactory, there is reason to believe that the engine has deteriorated to the extent that the published performance may not be obtained.

• COPYRIGHT © 2019 BY EAGLE COPTERS MAINTENANCE LTD •

This document is private and confidential and is supplied on the express condition that it is not to be used for any purpose or copied or communicated to any other person without written permission from Eagle Copters Maintenance Ltd.

Revision: A



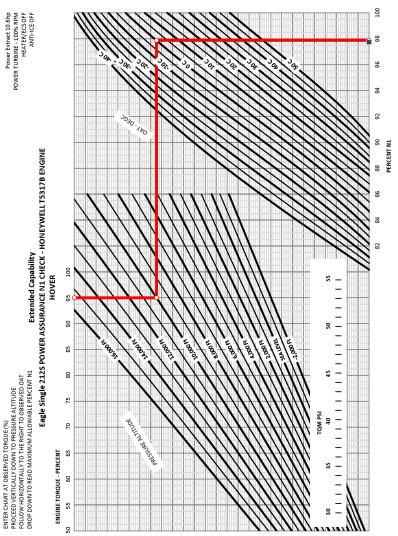


Figure 4-2 – Power Assurance Check – N1 Limited (D)

COPYRIGHT © 2019 BY EAGLE COPTERS MAINTENANCE LTD

This document is private and confidential and is supplied on the express condition that it is not to be used for any purpose or copied or communicated to any other person without written permission from Eagle Copters Maintenance Ltd.

Revision: A



4.3 Hover Ceiling Charts (D)

The Hover Ceiling charts (See Figure 4-3 Sheets 1-8) present hover performance IGE and OGE (allowable gross weight) for conditions of pressure altitude and outside air temperature (OAT). For actual gross weight limitations during takeoff and landing, refer to Figure 1-1. The 204-704-037-003 particle separator kit is not approved as part of this modification.

Note

Dashed lines are included for interpolation purposes only.

• COPYRIGHT © 2019 BY EAGLE COPTERS MAINTENANCE LTD •

This document is private and confidential and is supplied on the express condition that it is not to be used for any purpose or copied or communicated to any other person without written permission from Eagle Copters Maintenance Ltd.

Revision: A
Date: 19

19.02.15

TCCA Approved



In Ground Effect 4 Foot Skid Height Takeoff Power De-icing Off

Engine RPM 100%

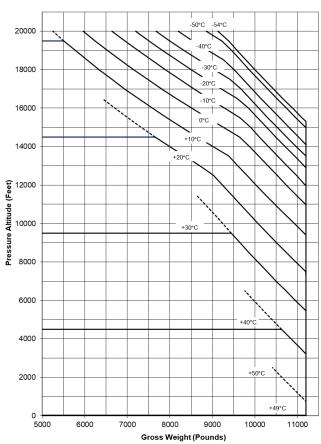


Figure 4-3 – Hover Ceiling (without Particle Separator) (Sht 1 of 8)

• COPYRIGHT © 2019 BY EAGLE COPTERS MAINTENANCE LTD •

This document is private and confidential and is supplied on the express condition that it is not to be used for any purpose or copied or communicated to any other person without written permission from Eagle Copters Maintenance Ltd.

Revision: A

TCCA Approved



In Ground Effect 4 Foot Skid Height Takeoff Power De-icing On

Engine RPM 100%

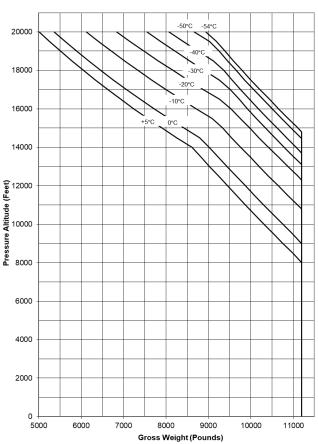


Figure 4-3 – Hover Ceiling (without Particle Separator) (Sht 2 of 8)

• COPYRIGHT © 2019 BY EAGLE COPTERS MAINTENANCE LTD •

This document is private and confidential and is supplied on the express condition that it is not to be used for any purpose or copied or communicated to any other person without written permission from Eagle Copters Maintenance Ltd.

Revision: **A**Date: 19

19.02.15



In Ground Effect 4 Foot Skid Height Max. Cont. Power De-icing Off

Engine RPM 100%

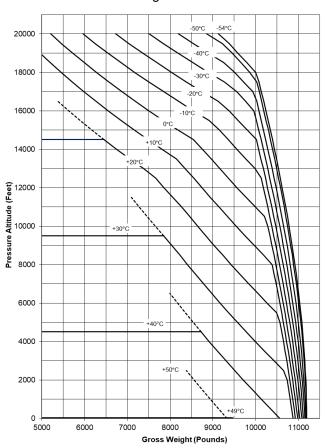


Figure 4-3 – Hover Ceiling (without Particle Separator) (Sht 3 of 8)

• COPYRIGHT © 2019 BY EAGLE COPTERS MAINTENANCE LTD •

This document is private and confidential and is supplied on the express condition that it is not to be used for any purpose or copied or communicated to any other person without written permission from Eagle Copters Maintenance Ltd.

Revision: A

TCCA Approved



In Ground Effect 4 Foot Skid Height Max. Cont. Power De-icing On

Engine RPM 100%

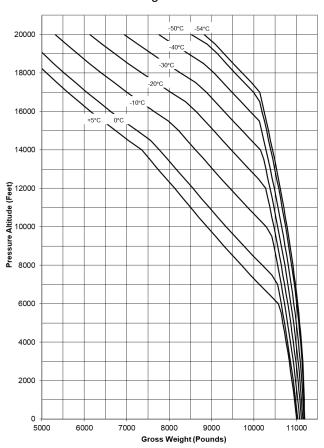


Figure 4-3 – Hover Ceiling (without Particle Separator) (Sht 4 of 8)

• COPYRIGHT © 2019 BY EAGLE COPTERS MAINTENANCE LTD •

This document is private and confidential and is supplied on the express condition that it is not to be used for any purpose or copied or communicated to any other person without written permission from Eagle Copters Maintenance Ltd.

Revision: A
Date: 19

19.02.15



Out of Ground Effect 60 Foot Skid Height

Takeoff Power De-icing Off

Engine RPM 100%

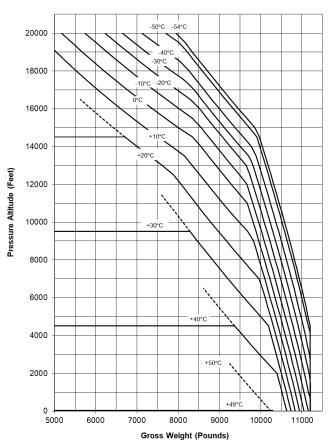


Figure 4-3 – Hover Ceiling (without Particle Separator) (Sht 5 of 8)

• COPYRIGHT © 2019 BY EAGLE COPTERS MAINTENANCE LTD •

This document is private and confidential and is supplied on the express condition that it is not to be used for any purpose or copied or communicated to any other person without written permission from Eagle Copters Maintenance Ltd.

Revision: A



Out of Ground Effect 60 Foot Skid Height

Takeoff Power De-icing On

Engine RPM 100%

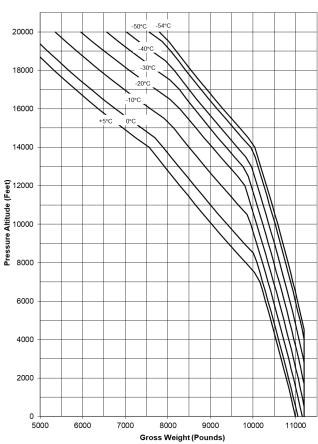


Figure 4-3 – Hover Ceiling (without Particle Separator) (Sht 6 of 8)

• COPYRIGHT © 2019 BY EAGLE COPTERS MAINTENANCE LTD •

This document is private and confidential and is supplied on the express condition that it is not to be used for any purpose or copied or communicated to any other person without written permission from Eagle Copters Maintenance Ltd.

Revision: **A**Date: 19

19.02.15



Out of Ground Effect 60 Foot Skid Height

Max. Cont. Power De-icing Off

Engine RPM 100%

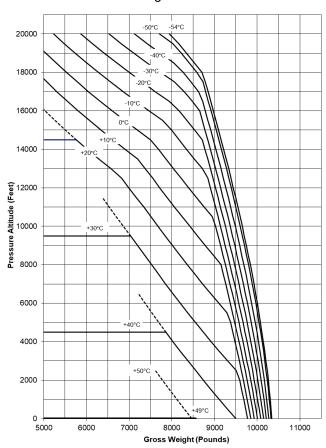


Figure 4-3 – Hover Ceiling (without Particle Separator) (Sht 7 of 8)

• COPYRIGHT © 2019 BY EAGLE COPTERS MAINTENANCE LTD •

This document is private and confidential and is supplied on the express condition that it is not to be used for any purpose or copied or communicated to any other person without written permission from Eagle Copters Maintenance Ltd.

Revision: A

19.02.15

TCCA Approved Date:



Out of Ground Effect 60 Foot Skid Height

Max. Cont. Power De-icing On

Engine RPM 100%

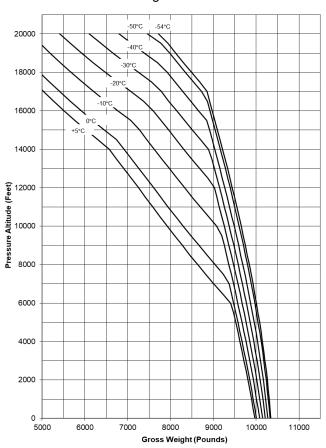


Figure 4-3 – Hover Ceiling (without Particle Separator) (Sht 8 of 8)

• COPYRIGHT © 2019 BY EAGLE COPTERS MAINTENANCE LTD •

This document is private and confidential and is supplied on the express condition that it is not to be used for any purpose or copied or communicated to any other person without written permission from Eagle Copters Maintenance Ltd.

Revision: A
Date: 19

19.02.15



Weight and Balance Data

No change from Flight Manual Supplement FMS-D212-725-1 Revision H, dated 2019 February 15, or later TCCA approved revision.

• COPYRIGHT © 2019 BY EAGLE COPTERS MAINTENANCE LTD •

This document is private and confidential and is supplied on the express condition that it is not to be used for any purpose or copied or communicated to any other person without written permission from Eagle Copters Maintenance Ltd.

Revision: A

TCCA Approved